


Sounder / Flasher (24 VDC)



Siren & Strobe

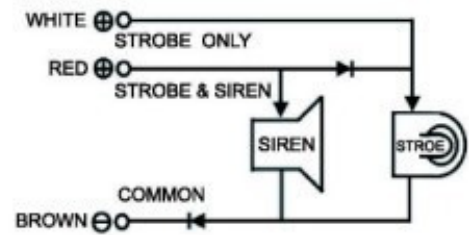

Audio-Visual Alarm:

Gas Alarm Systems Combined Siren / Strobe can be used for warning and signalling for Gas Monitoring Systems, for Equipment Alarm, Fire Alarm including Plant Room Alarm.

It works on 24 VDC, 250 mA and has 3 wires for independent operation. Use the Strobe (Flasher) for Lo-Alarm (or warning) and the Siren (Sounder) for Hi-Alarm (Final Alarm). It is suitable for wall/panel mounting (with 2 screws).

Key Features/ Specifications:

- Model: MLD-95
- Voltage: 24 VDC
- Current: 250 mA
- Sound: Siren Sound
- Colour: RED
- Size: 122 x 32 x 75 mm
- Sound: 105 dB +/- 3 dB (30 cm)
- 3-wire for independent operation